


SJQ

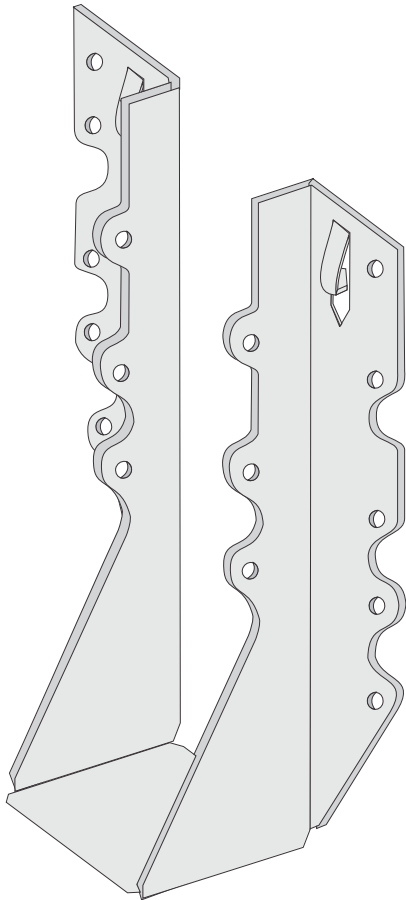

DESIGN FEATURES

TAMLYN custom-die designed and manufactured for quick installation and maximum load value.

MATERIAL

20ga. galvanized steel. Available in G-185 Triple Zinc or Hot-Dip Galvanized. Call for availability.

CODES

FL Approval #8283, ICC ESR-1347

NOTES

- 1. Nails are 10d by 1-1/2 inch joist hanger nails.
- 2. Allowable loads are for hangers nailed into wood or structural composite lumber having an effective specific gravity of 0.55 (such as Southern Pine) or greater.
- 3. Allowable gravity (bearing) loads have been adjusted by load duration factors, CD, of 1.0 (100%), 1.15 (115%), and 1.25 (125%), corresponding to the typical durations of occupancy live loads, snow loads and construction loads, respectively. No further increases in allowable loads are permitted.

ITEM ID	REF	JOINT SIZE	DIMENSIONS			NAIL SCHEDULE¹		ALLOWABLE LOADS -SYP²(LBF)		
			W	H	B	Joist	Header	Gravity³ 100%	Gravity³ 115%	Gravity³ 125%
SJQ24	LU24	2X4	1-5/8"	3-1/8"	1-1/2"	2	4	504	580	623
SJQ26	LU26	2X6, 8	1-5/8"	4-3/4"	1-1/2"	4	6	756	869	945
SJQ28	LU28	2X8, 10	1-5/8"	7"	1-1/2"	6	8	1008	1159	1260
SJQ210	LU210	2X10, 12, 14	1-5/8"	7-7/8"	1-1/2"	6	10	1260	1449	1575

