

TRSPT-2

DESIGN FEATURES


Used for wind resistance or seismic conditions. The Stud Plate Ties fasten the bottom plate or the top plate (double plate) to the studs.

MATERIAL

18 GA Galvanized Steel

CODES

ICC ESR-1347

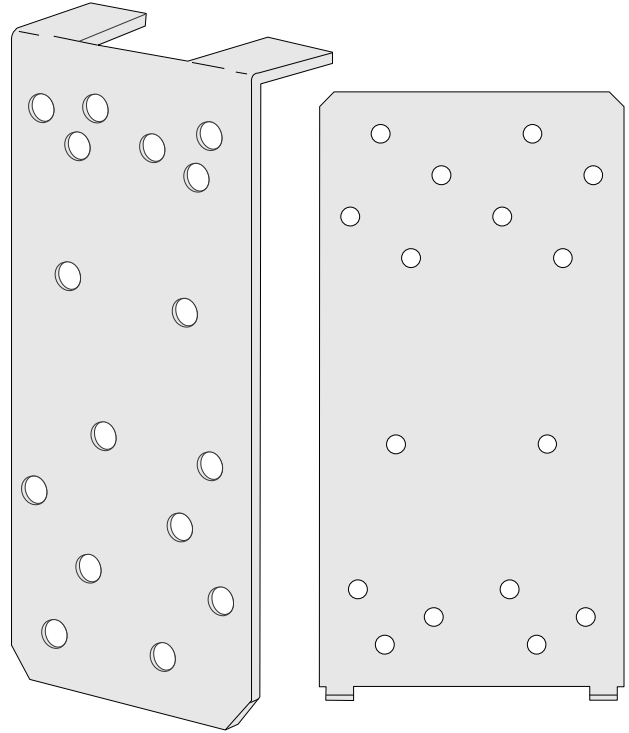

ITEM ID	CONNECTION ACHIEVED	STEEL GAGE NO.	HEIGHT	WIDTH	NAIL SCHEDULE ¹		ALLOWABLE UPLIFT LOADS ⁴ (lbf)	
					To Plate	To Stud	DFL ²	SYP ³
TRSPT6-2	Stud to double plate for high wind	18	5-1/2"	2-3/4"	6-10d	8-10d	652	837
	Stud to single plate				6-10d	8-10d	394	394

