

VLCA

DESIGN FEATURES




Provides a continuous under soffit air flow to provide superior ventilation.

MATERIAL

3105-type aluminum sheet with a minimum tensile strength of 29,000 psi, or equivalent, as referenced in AAMA 1482-86 (paragraph 3.2.3). The metal is treated on both sides with a non-chromate chemical conversion coating to ensure excellent paint adhesion and resistance to corrosion.

FINISH

Stocked in mill finish, white, and brown, Available in popular siding/soffit colors in standard face only color match or full coverage CoastalColor Coating™ upon request.

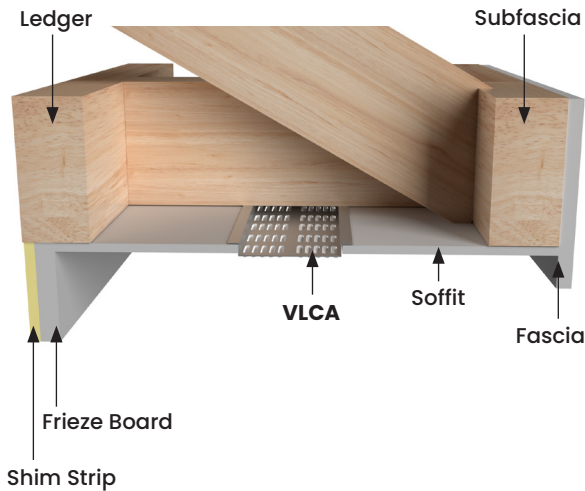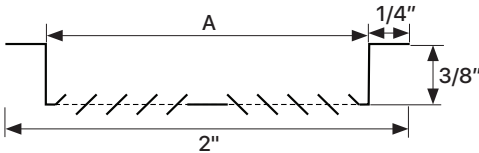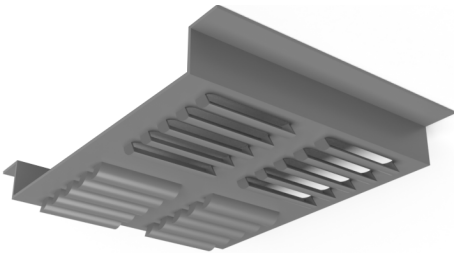

ITEM ID	A	FINISH	NFA*
VLCA2	2-1 \ 2"	MILL	9
VLCA2-BR	2-1 \ 2"	BROWN	9
VLCA2-WH	2-1 \ 2"	WHITE	9

All parts are 8' Length standard unless otherwise indicated
*NFA =net free area / sq.in.per linear ft.