



#### **LIMITED WARRANTY**

TAMLYN warrants defective-free products for a period of 10 years for the original purchaser unless otherwise stated for the specific product ordered. TAMLYN products are further warranted as to adequacy of design, provided products are properly specified and installed. This warranty does not apply in the event products are altered in any way or are improperly installed. Liability is limited to replacement of products proven to be defective. TAMLYN has made no other warranty, express or implied, regarding its products, including but not limited to, any warranty regarding merchantability or fitness for a specific purpose. Any claim that a product is defective must be brought within 1 month of the date of installation of such products to the original purchaser. Customer hereby agrees that no other incidental or consequential damages are the responsibility of TAMLYN.

Responsibility remains with the architect or engineer, contractor and owner for the design, application and proper installation of each Tamlyn product. Specifier and user shall determine the suitability of products for specific application and assume all responsibilities in connection there within.

## **PLEASE NOTE**

TAMLYN reserves the right to change designs, specifications and product availability without notice or liability for such changes. Samples of our products are available upon request at no charge.

TAMLYN products are typically identified using an alphabetic descriptor system which makes it easier to find a part by it's "number".

TAMLYN products are produced in a variety of gauges and finishes. Here, also, we are utilizing an alphabetic descriptor "number" on the majority of items.

Regional variances in naming of roofing trim parts is common.

TAMLYN uses the names in most common use in the markets where we are based.

Unless specifically noted all dimensions are nominal and are intended to be used as such in the same manner as common lumber dimensions.



## **CONVENTIONAL FLASHING**

ME	Style "A" Hemmed Roof Edge	
MG	Style "G" Unhemmed Roof Edge	
DL	Style "D" Roof Edge	. 5
GA	Style "GA" Gutter Apron	
BF	Angle/Base Steel Flash No Hem	
BFH	Angle/Base Steel Flash Two Hem	
BFHH	Angle/Base Steel Flash One Hem	
JF	"J" Turnback Flashing	. 8
AF	Apron Flashing	. 8
SB	Shingle Base Flashing	. 9
CF	Style "CF" Counterflash	. 9
FS	Steel Step Shingles	
FS	Steel Flat Tin Shingles	10
С	Style "C" Rain Diverter	.11
GE/GM	Style "E" Gravel Guard	.11
RF	Galvanized Roll Flashing	12
PW/HWO	Pre-Formed Roof Valley Pans	12
GF	Specialty Flashing	
WF	Steel Window Flashing	14
Z	Steel "Z" Flashing	
TF	Style "TF" Termite Shield	16
TS	Termite Shield	16
PLYOX	Plylox Window Clip	
RRS46	Residential Roofing Safety Strap	
HMA	Soffit H-Mold	

## Standard Sheet metal gauges (Nominal Dimensions)

Gauge	Galvanized Steel (inch)	Aluminum (inch)
10	0.135	0.102
11	0.120	0.091
12	0.105	0.081
13	0.090	0.072
14	0.075	0.063
15	0.067	0.057
16	0.060	0.051
17	0.054	0.045
18	0.048	0.040
19	0.042	0.036
20	0.036	0.032
21	0.033	0.028
22	0.030	0.025
23	0.027	0.023
24	0.024	0.002
25	0.021	0.018
26	0.018	0.017
27	0.016	0.014
28	0.015	0.013
29	0.014	0.011
30	0.012	0.010
31	0.011	0.009
32	0.010	-

# ME



ITEM ID	FACE	ON ROOF
ME130	1″	2″
ME11230	1-1/2"	1-1/2"
ME240	2"	2"


## **DESIGN FEATURES**

Economical Metal Edge for general use. Deflects water away from fascia board. Hemmed edges for safe handling. Dimensions are nominal.

## **MATERIAL**


Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



## STYLE "G" UNHEMMED ROOF EDGE

# MG




ITEM ID	FACE	ON ROOF
MG2540	2-1/2"	1-1/2"
MG260	2"	4"
MG360	3"	3"

## **DESIGN FEATURES**

Metal Edge for general use. Deflects water away from fascia board. Unhemmed edges require cautious handling.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



# DI


## **DESIGN FEATURES**

Style "D", "DL", or Eave Drip are common names for this item. Deflects water away from fascia board. Hemmed edges for safe handling. Extended lip helps prevent shingle damage. Open nose of edge allows ease of installation on steeply pitched roofs.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.  $\,$ 

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



`	

ITEM ID	FACE	ON ROOF
DL145	1"	2″
DL1545	1-1/2"	1-1/2"
DL1560	1-1/2"	3″

STYLE "GA" GUTTER APRON




## **DESIGN FEATURES**

Deflects water away from fascia board. Used commmonly with very steep pitched roofs with gutters. May be used in most roofing applications.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



ITEM ID	FACE	ON ROOF
GA250	2"	2-3/4"
GA260	2"	3-3/4"



ITEM ID	Α	В
BF1012	1″	2"
BF1022	2"	2"
BF1024	2"	4"
BF1033	3"	3"
BF1035	3"	5"
BF1044	4"	4"
BF1046	4"	6"
BF1055	5"	5"
BF1066	6"	6"
BF10612	6"	12"


GREATER THAN 90°

ITEM ID	A	В
BF1044-120	4"	4"
BF1046-120	4"	6"
BF1055-120	5″	5″

Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections. Double Hemmed parts are safer products for retail outlet sales. Angles other than 90° available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



# BFH


## **DESIGN FEATURES**

Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections. Hem on this part is a low opening of approximately 3/32". Other sizes available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



ITEM ID	A	В
BFH1033	3″	3″
BFH10435	4"	3-1/2"
BFH1044	4"	4"
BFH10455	4-1/2"	5"
BFH10545	5"	4-1/2"
BFH1055	5"	5"
BFH10655	6"	5-1/2"

BFH1066

ANGLE/BASE STEEL FLASH DOUBLE HEM


# **BFHH**

## **DESIGN FEATURES**

Double Hemmed 10' Length 25/BDL Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections. Double Hemmed parts are safer products for retail outlets.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



ITEM ID	A	В
BFHH1035	2-7/8"	4-7/8"

# JF



ITEM ID	A	В
JF1044	4"	4-1/2"
JF1045	4"	5″
JF1055	5″	4-1/2"
JF1065	6"	5-1/2"
JF6610	6"	6"
JF1066	6"	6-1/2"
JF116	6"	11-1/2"


## **DESIGN FEATURES**

Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections. Double Hemmed parts are safer products for retail outlet sales. Angles other than 90° available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



## APRON FLASHING

# AF




IT	EM ID	Α	В
Al	F7	3″	3-1/2"
Al	F75	3-1/2"	4"
Al	F8	3-1/2"	4-1/2"

## **DESIGN FEATURES**

Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections. Double Hemmed parts are safer products for retail outlet sales. Angles other than 90° available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



# SE

## **DESIGN FEATURES**


Protects against leaks at transition of walls to roof and chimneys to roof connections. Flexibility of either style allows for jobsite adjustment of angle to fit roof slope.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.





ITEM ID	А	В
SB4120	3″	5″
SB6314	6"	3-1/2"
SB6512	6"	5-1/2"
SB61112	6"	11-1/2"

STYLE "CF" COUNTERFLASH


# CF


## **DESIGN FEATURES**

Deflects water away from chimneys, etc. Used with other trims to secure watertightness. Other sizes available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

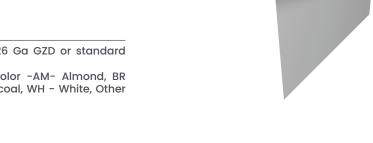



ITEM ID	FACE	В
CF50	3-1/2"	7/8″
CF60	4-1/2"	7/8″
CF70	5-1/2"	7/8″

# FS



ITEM ID	HEIGHT	WIDTH	LENGTH
FS447	4"	4"	7"
FS448	4"	4"	8"
FS4410	4"	4"	10"
FS557	5"	5"	7"
FS6610	6"	6"	10"
FS6612	6"	6"	12"


## **DESIGN FEATURES**

Multiple uses including chimney and skylight flashing. Furnished in pre-cut, user friendly pieces; no need to spend valuable time cutting 10' flashing pieces to required shorter lengths. Other sizes available as special order. **Sold in bundles of 100 PCS.** 

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



## STEEL FLAT TIN SHINGLES

# FS




ITEM ID	HEIGHT	WIDTH
FS57	5"	7"
FS87	8"	7"
FS88	8"	8"

## **DESIGN FEATURES**

Multiple uses including chimney and skylight flashing. Furnished in pre-cut, user friendly pieces; no need to spend valuable time cutting 10' flashing pieces to required shorter lengths. Other sizes available as special order. **Sold in bundles of 100 PCS.** 

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



## C

## **DESIGN FEATURES**

Deflects water away from doors, windows where no gutter is used. Installed on roof surface 2–3 couses above edge of roof. Also used as a roof edge in some areas.


## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.



ITEM ID	FACE	ON ROOF
C75-10	1-1/2"	5″



STYLE "E" GRAVEL GUARD


# **GE/GM**

## **DESIGN FEATURES**

Deflects water away from fascia board. Has a 3/4" knuckle for greater rigidity and to hide roof deck. Used with conventional gravel/flat roof applications. Other sizes available as special order.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



ITEM ID	FACE	ON ROOF
GE2050	2"	2-1/4"
GE3060	3"	2-1/4"
GE3570	3-1/2"	2-3/4"
GE3580	3-1/2"	3-3/4"

ITEM ID	FACE	ON ROOF		
GM2560	2-1/2"	3-1/4"		

# RF



## **DESIGN FEATURES**

Used primarily to provide improved water shed formed at roof junctions. May also be used at many other places on roofs. Additional uses include jobsite forming of special trim items. Painted roll - call for sizes & pricing.

## **MATERIAL**


Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

\*For PAINTED specify stock color -AM- Almond, BR -Brown, BK -Black, CB - Charcoal, WH - White, Other colors are Special order.

WIDTH	10 FT BLDR	25 FT BLDR	50 FT BLDR	10 FT STD	25 FT STD	50 FT STD	50 FT 26GA
4"	RF410B	RF425B	RF450B	so	SO	RF450	N/A
6"	RF610B	RF625B	RF650B	so	SO	RF650	N/A
8"	RF810B	RF825B	RF850B	RF810	RF825	RF850	N/A
10"	RF1010B	RF1025B	RF1050B	RF1010	RF1025	RF1050	N/A
12"	RF1210B	RF1225B	RF1250B	RF1210	RF1225	RF1250	RF1250H
14"	so	so	RF1450B	so	SO	RF1450	N/A
16"	RF1610B	so	RF1650B	RF1610	SO	RF1650	RF1650H
18"	SO	RF1825B	RF1850B	RF2010	SO	RF1850	RF1850H
20"	RF2010B	RF2025B	RF2050B	so	SO	RF2050	RF2050H
24"	RF2410B	RF3536B	RF2450B	so	RF2425	RF2450	RF2450H
36"	N/A	N/A	RF3650B	N/A	SO	SO	N/A

PRE-FORMED ROOF VALLEY PANS

# PW/HWO




## **DESIGN FEATURES**


Deflects water away from doors, windows where no gutter is used. Installed on roof surface 2-3 couses above edge of roof. Also used as a roof edge in some areas.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.

ITEM ID	Α	KNUCKLE
PW200	9″	1"
HWO180	7-1/2"	1"
HWO200	8-1/2"	1"
HWO240	10-1/2"	1"








Specialized Items which are useful in securing a watertight construction. Examples of the many unique parts available.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.





ITEM ID	FACE	DECK	кіскоит
GF425	4"	2-1/2"	1/2"




ITEM ID	A B		С	
WF34126	6″	1/2″	3/4"	
WF346	6"	3/4"	1/2"	
WF834	8"	3/4"	1/2"	
WF100	1-5/8"	1"	3/8"	
WF112	1-1/2"	1-1/8"	3/8"	
WF114	1-1/2"	1-1/4"	3/8"	
WF10	2-1/4"	1-1/4"	1/2"	
WF411412	4"	1-1/4"	1/2"	
WF106	1-1/2"	1-1/2"	1/2	
WF102	2-1/8"	1-1/2"	3/8"	
WF103	2"	1-1/2"	1/2"	
WF211238	2"	1-1/2"	3/8"	
WF121123	3"	1-1/2"	1/2"	
WF126	6"	1-1/2"	1/2"	
WF12134	1-3/4"	1-3/4"	1/2"	
WF122112	1-1/2"	2"	1/2"	
WF134	1-3/4"	2"	1/4"	
WF212	2"	2-1/2"	1/2"	
WF12212212	2-1/2"	2-1/2"	1/2"	
WF122124	4"	2-1/2"	1/2"	
WF122126	6"	2-1/2"	1/2"	
WF1233	3"	3"	1/2"	
WF3126	6"	3-1/2"	1/2"	
WF2312	2-1/2"	3-1/2"	1/2"	
WF12334334	3-3/4"	3-3/4"	1/2"	
WF412712	4-1/2"	7"	1/2"	

ITEM ID	Α	В	С	
WF100-105	1-5/8"	1″	3/8"	
WF103-105	2"	1-1/2"	1/2"	
WF12334334- 108	3-3/4"	3-3/4"	1/2"	
WF3126-110	6-110 6" 3-1/2"		1/2"	
WF344147-108	7"	4-1/4"	3/4"	
WF51251212-	5-1/2"	5-1/4"	1/2"	

Galvanized Window Flashing provides an inexpensive and easy to install method of stopping water penetration behind siding. Horizontal shelf is sloped 5–7 degrees toward outside wall.

## **MATERIAL**


Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.




Deflects water away from doors, windows where no gutter is used. Installed on roof surface 2–3 couses above edge of roof. Also used as a roof edge in some areas.

## **MATERIAL**

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.





ITEM ID	A B		С	
ZB516	1-3/16"	5/16"	1/2"	
ZB38	1-1/8"	3/8"	1/2"	
ZB716	1-1/16"	7/16"	1/2"	
ZB12	1"	1/2"	1/2"	
ZB1212112	1-1/2"	1/2"	1/2"	
ZB58	7/8"	5/8"	1/2"	
ZB34	3/4"	3/4"	1/2"	
ZB134	1-3/4"	3/4"	1/2"	
ZB34134	1-3/4"	3/4"	1/2"	
ZB3434112	1-1/2"	3/4"	3/4"	
ZB34214	2-1/4" 3/4"		1/2"	
ZB78	3/4"	7/8"	3/8"	
ZB781	1-1/8	7/8"	3/8"	
ZB1	1-1/2"	1"	3/8"	
ZB114	1-1/4"	1-1/4"	3/8"	
ZB112	1"	1-1/2"	1/2"	
ZB112158	1-5/8"	1-1/2"	3/8"	
ZB134134	1-3/4"	1-3/4"	3/8"	
ZB2	1-1/2"	2"	3/8"	
ZB214	1-3/8"	2-1/4"	3/8"	


## TF



## **DESIGN FEATURES**

Provides protection on ledgers, joists, etc by forcing termites to build visible channels.





## TERMITE SHIELD

# TS



## **DESIGN FEATURES**

Versatile pan has many contractor/home uses, including termite shield, pier cap, vaporizer pan, pot holder, oil drain pan, AC condensation drip pan in attic or to hold runoff while stripping furniture. Termite Shield doesn't totally eliminate termite infestation, but forces them to build easily visible channels.

ITEM ID	BLOCK OR POST SIZE		
TS88	8" x 8" or Smaller		
TS917	8" X 16" or Smaller		
TS1717	8" X 16" or Smaller		

# **PLYLOX**

#### **DESIGN FEATURES**

PLYLOX™ window clips are the ingenious, inexpensive, non-destructive way to protect your windows from high winds and airborne debris. Installed in seconds, PLYLOX™ window clips slide onto the edge of a 1/2" and 5/8" plywood sheet which is then easily inserted into the exterior window casings of your home or business. No drilling holes. After protecting your home or business from high winds and flying debris, the plywood can be removed in seconds without tools.



Maximum Allowable PLYLOX Clip Spacing (inches)						
Design Wind Speed (MPH, gust)	Nominal Recessed Width of Windown (inches)					
	24	36	48	60	72	96
Clip Spacing in Inches on the Vertical Edges						
110	24	24	24	24	16	8
120	24	24	24	16	8	6
130	24	24	16	8	8	N/A
140	24	24	12	8	6	N/A
150	24	16	8	6	N/A	N/A

RESIDENTIAL SAFETY STRAP

**RRS46** 



## **DESIGN FEATURES**

RRS48-One Time Use Strap Through Wall or Soffit Vents designed to last as Long as the building. Made from premium quality Stainless with all Stainless mount screws and all with Sealing gaskets. Packed in blister packs and merchandiser boxes.


2" Wide Synthetic Webbing Strap with a 2-1/2" D-ring sewn to one end. The opposite end has a folded and stiched loop. Attachment to structural frame members is by looping "D" Ring end through the web loop end around the frame member and pulling tight.

## NOTE

This device must be installed according to the detailed procedures for the specific use application as shown and supervised by a trained competent person. Not reading, understanding, and complying with the instructions could result in serious injury or death. RRS46 is a single component of a fall-arrest system, take care to inspect this parts and all other components for damage or mis-use prior to actual use. The location and attachment of safety straps must be in a manner that assures that the strap is attached to a structural or framing member that will securely provide the strength needed to support the person using the strap. Do not use straps in conditions where temperatures would exceed 200°F. Do not expose to welding or corrosives.

# **HMA**





## **DESIGN FEATURES**

Used to connect continuous soffit vent items, to join fiber cement or hardboard soffit and many other applications. Used when increased rigidity is needed.

## **MATERIAL**

6063-T5 .45" Extruded Aluminum Mill Finish

ITEM ID	DEPTH	Α	В
HM38A	3/8"	1-3/8"	11/16"
HM716A	7/16"	1-3/8"	11/16"

Available in Bldr, or STD, or 26 Ga GZD or standard colors as listed.



# 

FAMILY. VALUE. SERVICE.









## **TAMLYN Corporate Headquarters**

13623 Pike Rd, Stafford, TX 77477 www.tamlyn.com | office: 800-334-1676 | info@tamlyn.com