

DESIGN FEATURES


When the project requires a strong and durable wrap, **ProSelect™** is the choice for the professional builder. **ProSelect™** is a high performance water and air resistive barrier product designed for the harsh conditions of a jobsite. **ProSelect™** is made from multiple non-woven and barrier layers that provide superior durability, moisture and air infiltration protection.

BENEFITS

- Superior UV resistance
- Easier installation with 5' rolls
- Vapor permeable
- Type 1 Air Barrier
- Meets and exceeds ICC AC38 WRB code requirements
- Works with various cladding materials

WARRANTY

Tamlyn is committed to providing great products that are durable and long-lasting. All wraps offer a 15 Year Product Warranty and, when installed with other Tamlyn accessories as a system, Tamlyn offers a 25 Year Product and Labor Limited Warranty.

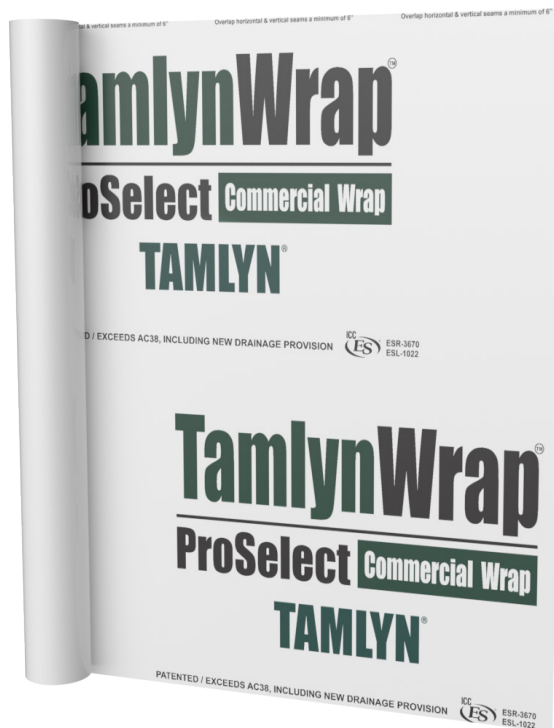

Rolls are 5' x 200'

Test Method		*Test Results
Dry Breaking Force / ASTM D 5034	Cross-Machine Direction	52.3 lbf
	Machine Direction	60.2 lbf
Water Resistance / AATCC Test Method No. 127 (55cm water x 5hrs)	Control	No water leakage
	Weathered	No water leakage
Water Vapor Transmission / ASTM E 96		19 perms
Cold Mandrel Bend	Cross-Machine Direction	House wrap did not crack
	Machine Direction	House wrap did not crack
Air Permeance / ASTM E2178 (material)		<0.004 (CFM/ft²)
Air Barrier / ASTM E1677 (system)		Type 1 Air Barrier
Air Resistance		Pass
Water Resistance		Pass
Combustibility / ASTM E 84		FSI-Class A
		NSDI-Class A
Weathering-UV Resistance		270 days max

*Based on testing averages.